

# FastCOLOUR

FastCOLOUR-ONE Printer UV and Non-UV Wiring Connections

## 1. Chiller Cable


Connect Chiller Cable for UV printing.  
Yellow wire connects to the middle section,  
Blue and Brown on the side.  
UV-Light should be ON behind the carriage,  
switch Blue/Brown can switch lighting  
order. For a single LED, installing on LEFT is  
recommended.

(Brown) UV1+

(Yellow) GND-

(Blue) UV2+

For Non-UV, remove the chiller and chiller  
cable.

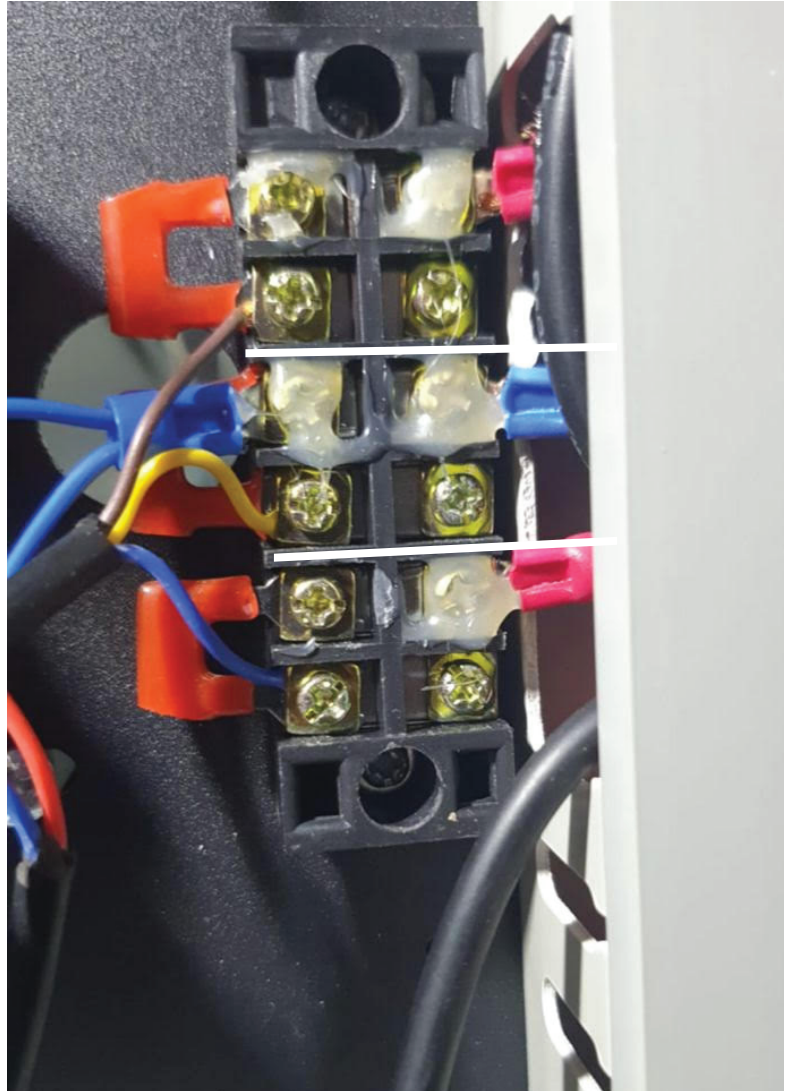

## 2. Heater

For UV Printing, turn OFF of Heater in **OK MENU** Setting,  
also remove the header/fan installed in front.

For Non-UV Printing, turn ON Heater is recommended.

