

# TIMER

<b>DH48S</b>	<b>DIGITAL TIMER</b>	<b>DH48S-2Z</b>
--------------	----------------------	-----------------


## ■ CHARACTERISTICS

● Time ranges:


Select switch:	h    m	m    s	s
Time ranges:	1m—99h99m	1s—99m99s	0.01s—99.99s

- Supply voltage: AC/DC 100–240V
- Control output: AC 250V 3A (Resistive)
- Accuracy: 0.01%+0.05s
- Contact: DH48S-2Z:2c
- Ambient temperature: Operating: -10°C to 55°C
- DH48S:1c
- Power consumption: ≤3VA
- Panel cutout: 45×45 mm
- Display: UP
- Weight: 0.3kg

## ■ OPERATION MODE

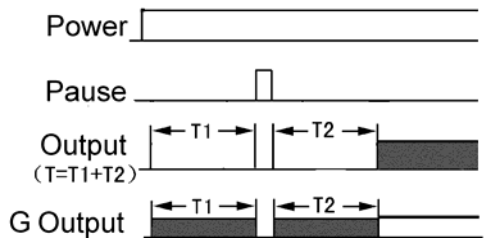

## ■ DIMENSIONS

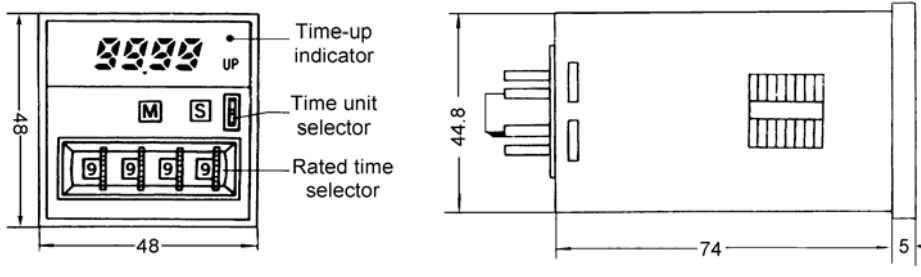

## ■ CONNECTIONS

