COMPRESSOR INTERFACE LANGUAGE CHANGE

To change the AG-AIR/SCREW-15: 15kW 16Bar Rotary Screw Air Compressor 1.2 m³/min, Permanent Magnet Synchronous Variable Frequency with Touchscreen, 6-Level Filter, Air Dryer (Suitable for ≤3kW Fiber Laser) TSEPM15-16 interface to language to english follow these steps;






Tap on the buttons highlighted by the red arrows. Step 1




Step 2

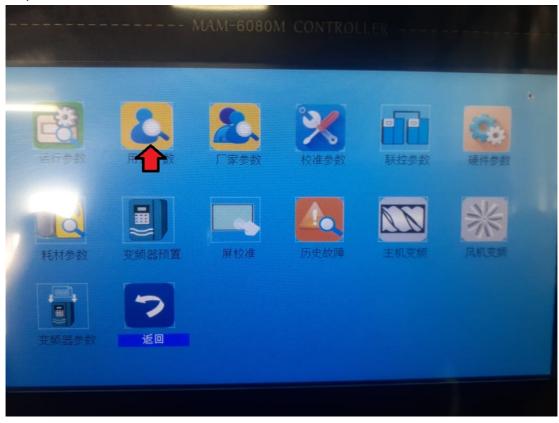

Step 3

МАМ-60	80M CONTROLLER -	
供气加载压力(MPa):	01.35	
供气卸载压,力(MPa): 风机启温度(℃):	01.55 0093	
凤温度(℃):	0085	
风机启动延时(秒): 加载延时(秒):	0002 0020	
停机延时(秒): 重启延时(秒):	0020 0100	
上页	下页	返回

Step 4

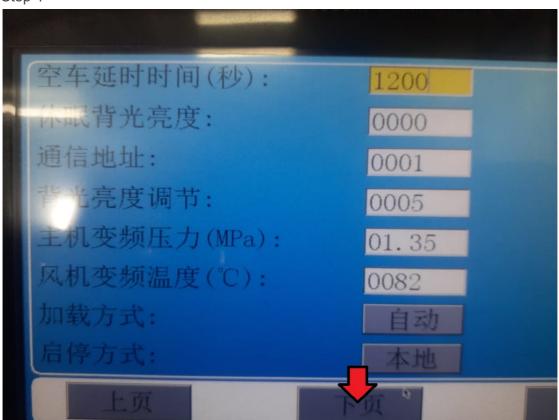

Step 5



Step 6

MAM-6080M CONTROLLER		
RUN MODE:	MOTOR VSD	
RECOVER SYS VARS:	0000	
WIFI FUNC SEL:	DISABLE	
COM MODE:	COMPUTER	
PRESSURE UNIT:	MPa	
TEMPERATURE UNIT:	°C	
LANGUAGE:	ENGLISH	
USER PASSWORD:	***	
UP	DOWN	

KB article by Takura Mutami.